


DMG14428F016_05WN

Features:

- Powered by T5F0 ASIC, running DGUS II HMI platform.
- 1.66 inch, 142*428 resolution, IPS-TFT LCD.
- 20 pins, including UART2, SD card, Buzzer, touch screen interface.
- Supporting connected to 4-wire RTP, CTP, buzzer or speaker.

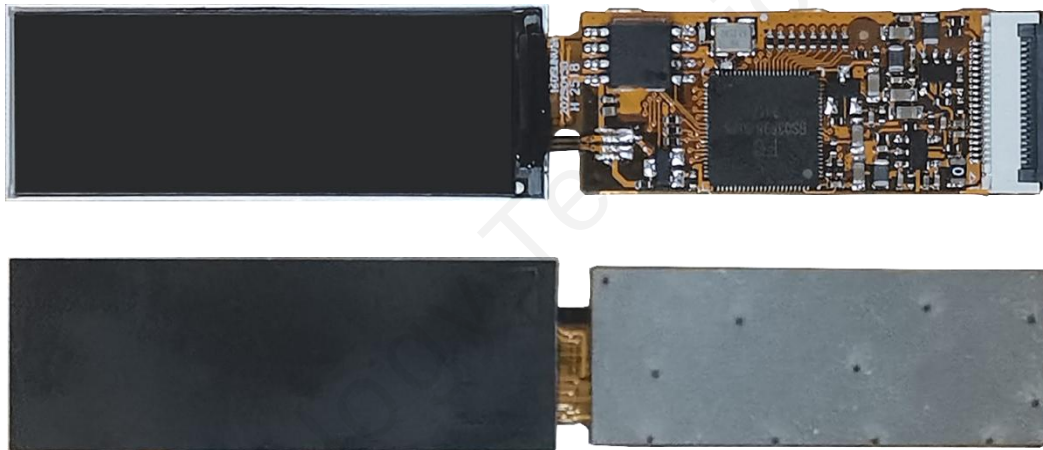

1. External interface



User interface

PIN#	Definition1	Function1	Definition2	Function2
1	VIN	Power supply, DC4.5-5.5V.		
2	VIN			
3	GND	GND		
4	GND			
5	GND			
6	3.3V OUT	3.3V output, maximum load of 100mA.		
7	TX2	UART2		
8	RX2			
9	SD_D0	When JIOS is in the air, SD card interface.	TMS	When JIOS is shorting circuit to ground, JTAG interface.
10	SD_D1		TCK	
11	SD_D2		TDI	
12	SD_D3		TDO	
13	SD_CLK		TX1	Multiplexed UART1
14	SD_CMD		RX1	
15	TPY1	4-wire resistive touch screen interface	CTP_SDA	Capacitive touch screen interface. When connected to CTP, the CTP_SDA and CTP_INT need to be pulled up to 3.3V by an external 4.7K resistance.
16	TPX1		CTP_INT	
17	TPY0		CTP_SCL	
18	TPX0		CTP_RST	
19	JIOS	JTAG/IO choose		
20	BUZZ	Buzzer drives output	D/A	Audio PWM DA output

2. Specification parameters

2.1 Product parameters

Main Chip	T5F0
User Interface	20Pin_0.5mm FCC
FLASH	8MB
UI Version	DGUS II
Debugging Tools	HDL662SZ5 adapter board power supply
Size	1.66 inch
Resolution	142*428
Viewing Area (VA)	13.16mm (W)×39.68mm (H)
Viewing Angle	Wide viewing angle (typical values are 85°/85°/85°/85°), high contrast, and good color reproduction
Backlight Service Life	>10,000 hours
Brightness	400nit
Brightness Control	100-level brightness adjustment (Flickering may occur at 1%-30% of max brightness; not recommended for use in this range)

2.2 Interface parameters

Item	Conditions	Min	Typ	Max	Unit
Baud Rate	User Set(Configure the CFG file)	3150	115200	3225600	bps
Output Voltage(TXD)	Output 1	3.0	3.3	-	V
	Output 0	-	0	0.3	V
Input Voltage(RXD)	Input 1	-	-	3.3	V
	Input 0	0	-	0.5	V
Interface	UART2: TTL;				
Data Format	UART2: N81;				

2.3 Electrical specifications

Rated Power	<2W
Operating Voltage	4.5-5.5V, typical value of 5V.
Operating Current	103mA@5V (Power consumption with adapter board)
Recommended power supply: 5V 1A DC	

2.4 Operating environment

Operating Temperature	-20℃ to 70℃ (5V @ 60% RH)
Storage Temperature	-30℃ to 80℃
Operating Humidity	10%-90%RH, typical value of 60% RH.

3. ESD test

Test temperature: 25°C. Test humidity: 50%RH.

Test process: Place the product on the test bench fixture (approximately 15cm in height), and perform contact and air discharge tests on the smart LCM. Observe if any freezing, black or white screen, flickering, or rebooting occurs during the test.

Test conclusion: The product's ESD performance meets GB/T 17626.2 Class B standards.

Discharge Type	Discharge Value	Result
Contact discharge	±4KV	Normal operation
Air discharge	±4KV	Normal operation


4. Debug

It is recommended for new users of DWIN smart LCMs to purchase official accessories. For more details, please refer to customer service center.

Adapter board model: HDL662SZ5



Power supply of adapter board: HDLUSB1

Connecting cables: FCC20_0.5 L=50mm(B03692)

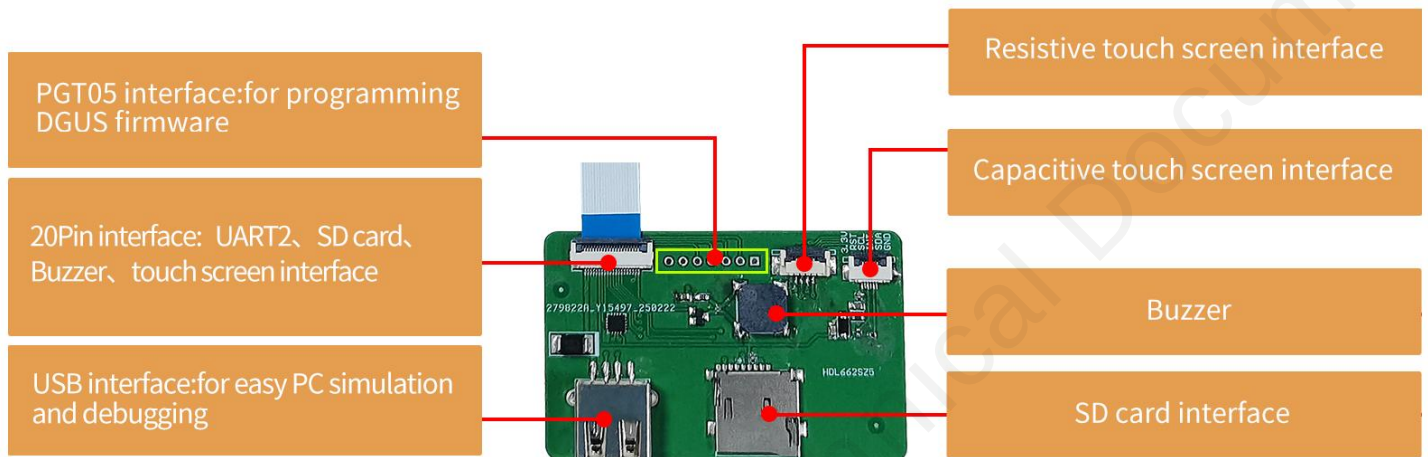

5. Packing capacity & dimension

Dimension				
Dimension	44.72(W) × 16.00 (H) × 1.57(T) mm			
Net Weight	5g			
Packing Capacity				
Model	Dimensions	Layer	Quantity/Layer	Quantity(Pcs)
Carton1:	220mm(L)×160mm(W)×47mm(H)	-	-	-
Carton2:	250mm(L)×200mm(W)×80mm(H)	-	-	-
Carton3:	320mm(L)×270mm(W)×80mm(H)	-	-	-
Carton4:	375mm(L)×275mm(W)×125mm(H)	-	-	-

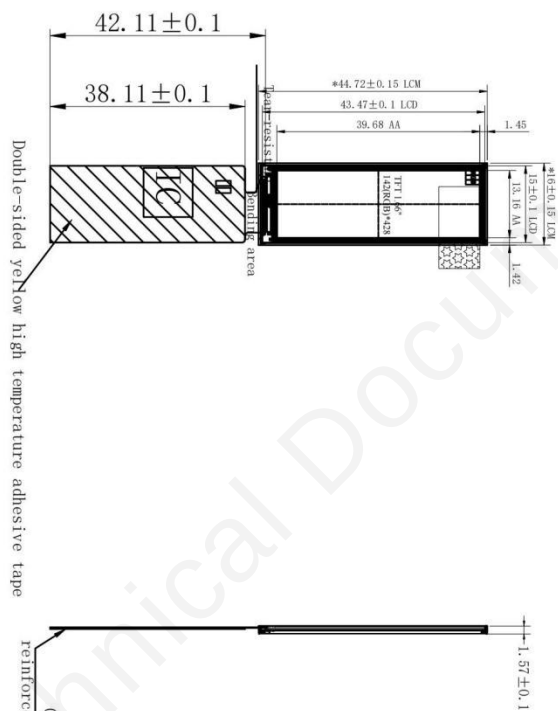


Socket Definition

Pin#	Name
1	+5V
2	+5V
3	GND
4	GND
5	GND
6	3.3V
7	TX2
8	RX2
9	SD_D0
10	SD_D1
11	SD_D2
12	SD_D3
13	SD_CLK
14	SD_CMD
15	TPY1
16	TPX1
17	TPY0
18	TPX0
19	J1DS
20	BUZZ

Front view

Side view

Back view



REVISION RECORD		VER	DATE	DWIN Technology			
1	First Edition	V1-1	20250526	FILE NAME : DMC14428F016_05NN		TOLERANCES : ± 0.1	
2				CUSTOMER NAME :		ANGLES : $\pm 0.1^\circ$	
3				DESIGN :		RELEASE:	
4				DRAWN BY		DATE 20250526	
5				CHECKED BY		DATE	
6				APPROVED BY		DATE	
						SCALE : 1:1	
						UNIT : mm	
						PRO. (3)	
							
						SHEET : 1/1	

6. Revision records

Rev	Revise Date	Content	Editor
00	2025-06-05	Preliminary version	Xu Ying

Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

- Customer service Tel: +86 400 018 9008
- Customer service email: dwinhmi@dwin.com.cn
- DWIN Developer Forum: <https://forums.dwin-global.com/>

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

Important Disclaimer

DWIN reserves the right to make any changes to product designs without prior notice.

Customers should ensure strictly adhering to all the relevant standards and requirements during the product application process, including but not limited to functional safety, information security, and regulatory provisions.

DWIN shall not bear any joint and several liability for any consequences that may arise from customers' adoption of DWIN products. In particular, for risks that may lead to significant property losses, environmental hazards, personal injury, or even death, especially in high-risk application areas such as military applications, flammable and explosive places, and life-saving medical equipment, customers should independently assess the risks and take corresponding preventive and protective measures. DWIN shall not bear any relevant responsibility.