


DMG19108C133_05WTC


Features:

- Based on the T5L2 ASIC CPU, running the DGUS II human-machine interaction software platform, smart LCM for commercial-grade applications.
- 13.3-inch, 1920*1080 pixels, 262K colors true-color display, IPS LCD screen, 2K HD smart screen.
- With onboard buzzer, RTC and speaker interface.
- Capacitive touch screen with GFF structure.

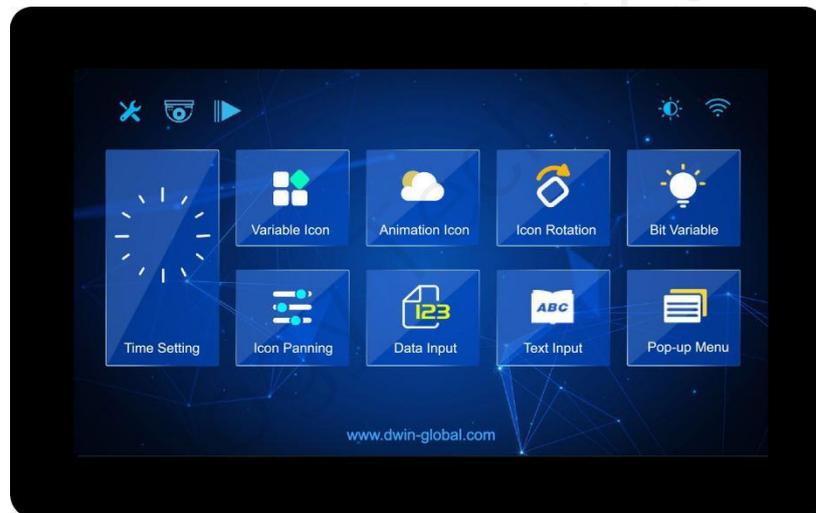

1. Hardware and interface

1.1 Hardware interface

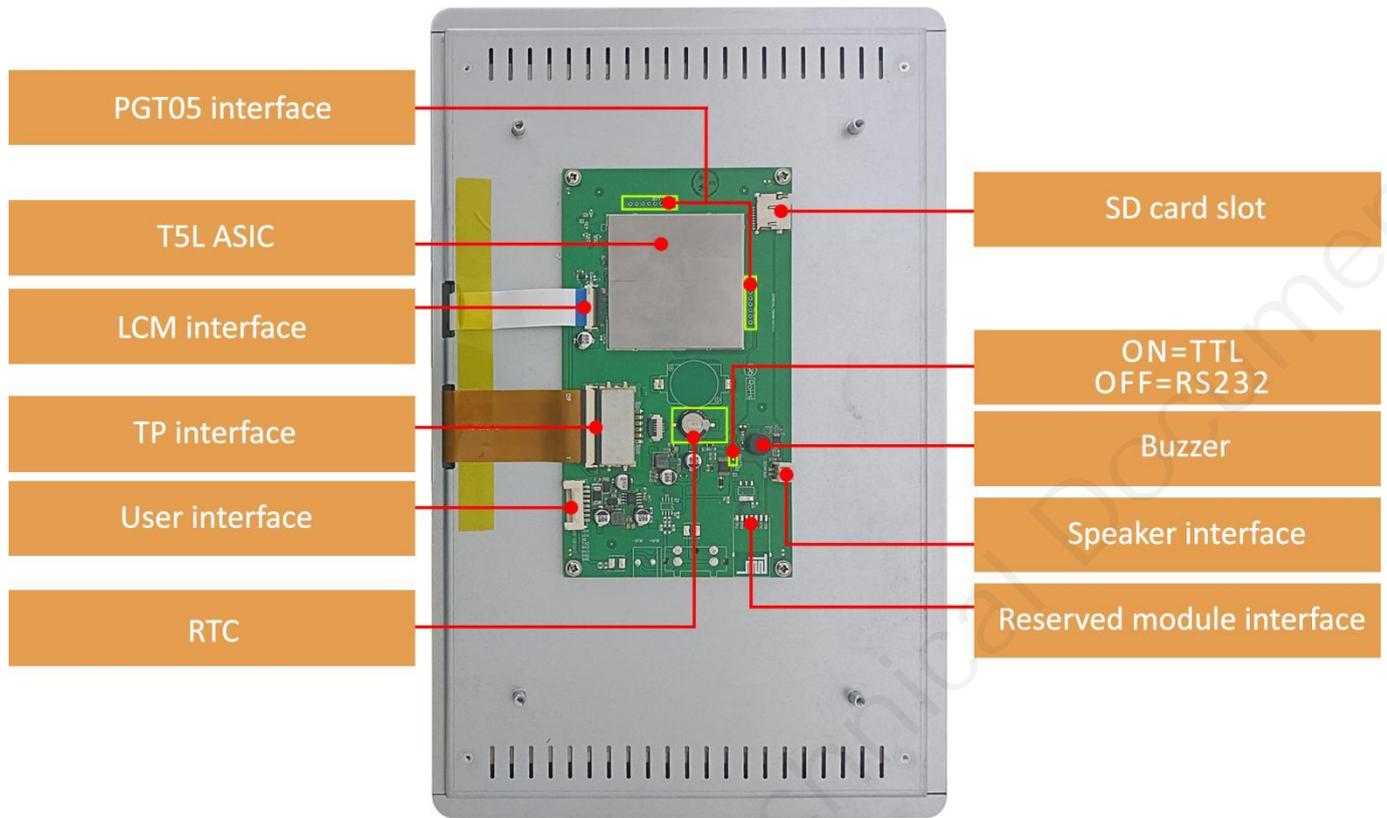

Hardware interface

1.2 Hardware and interface description

No.	Name	Description
1	T5L2 ASIC*3	DWIN independently developed, mass production in 2019; patented encryption technology ensures code and data security; low power consumption, strong anti-interference capability, easily passes EMC/EMI tests with dual-sided PCB design
2	User interface	8Pin_2.0mm socket for power supply and serial communication. Download rate(typical value): 12KByte/s
3	Flash	32MBytes (2*16MBytes NOR Flash), can be used to store user UI files such as fonts, images, music, etc., with erase/write cycles >100,000 times
4	Expand Flash pads	Two expansion slots are available, supporting expansion of NOR Flash and NAND Flash. The maximum expansion for NOR Flash is up to 64Mbytes. When combining NOR Flash and NAND Flash, the maximum expansion is up to 48Mbytes (using two expansion slots) + 512Mbytes (Inside the shield)
5	RTC	Super-capacitor supplies power to RTC, accuracy: $\pm 20\text{ppm}$ @25°C. Can maintain normal operation for 7 days after power-off. Reserved button cell power supply compatible circuit
6	Buzzer	3V passive buzzer
7	Speaker interface	2Pin_2.0mm socket, speaker interface
8	SD card interface	Supports downloading of all files (user UI files, CFG files, underlying kernel firmware), displays download statistics on the screen, download rate: 4 Mb/s. When downloading files, the SD card needs to be formatted in FAT32 format, with a recommended allocation unit size of 4096
9	Reserved module interface	Supports soldering of WI-FI module and USB download module. WI-FI module model: WI-FI-10; USB module models: HDL702, HDL703
10	PGT05 interface	Used for reprogramming the underlying DGUS firmware

2. Specification parameters

2.1 Display parameters

LCD Type	IPS process TFT display screen
Viewing Angle	Wide viewing angle (typical values are 85°/85°/85°/85°), high contrast, and good color reproduction
Resolution	1920×1080 pixels (0°/90°/180°/270°)
Color	262K color (18-bit 6R6G6B)
Active Area (A.A.)	293.76mm (W)×165.24mm (H)
View Area (V.A.)	293.76mm (W)×165.24mm (H)
Interface	eDP
Backlight Mode	LED
Backlight Service Life	>10000 hours (Time of the brightness decaying to 50% on the condition of continuous working with the maximum brightness)
Brightness	250nit
Brightness Control	0~100 grade (When the brightness is adjusted to 1%~30% of the maximum brightness, flickering may occur and is not recommended to use in this range)
Note: You can use dynamic screen saver wallpapers to avoid afterimages caused by fixed page display for a long time.	

2.2 Touch parameters

Type	Capacitive touch panel
Interface	I ² C
Structure	G+FF structure with surface cover of tempered glass
Touch Mode	Single point touch and support continuous sliding touch
Surface Hardness	6H
Light Transmittance	>90%
Life	Over 1,000,000 times touch

2.3 Serial interface parameters

Mode	UART2: ON=TTL/CMOS; OFF=RS232				
Voltage Level	Test Condition	Min	Typ	Max	Unit
	Output 1, Iout = -4mA	4.78	5.0	-	V
	Output 0, Iout = 4mA	-	-	0.4	V
	Input 1	2.5	5.0	-	V
	Input 0	0	-	1.0	V
Baud Rate	3150~3225600bps, typical value of 115200bps				
Data Format	UART2: N81				
Interface Cable	8Pin_2.0mm				

2.4 Electrical specifications

Rated Power	<10W	
Operating Voltage	12~36V, typical value of 12V	
Operating Current	510mA	VCC=12V, max backlight
	130mA	VCC=12V, backlight off
Recommended power supply: 12V 1A DC		

2.5 Operating environment

Operating Temperature	0°C~50°C (12V @ 60% RH)
Storage Temperature	-20°C~60°C
Conformal Coating	None
Operating Humidity	10%~90%RH, typical value of 60% RH

3. Reliability test

3.1 Electrostatic discharge test

Test temperature: 25°C. Test humidity: 50%RH.

Test process: the product was placed on the test bench to perform contact and air discharge in turn of the serial screen iron frame and display area as shown in Fig.3.1 below. During the experimental process, it was observed whether the screen is dead, black, white, splash, or reboot. According to the experiment results, the performance is in line with the criteria GB/T 17626.2 B level and above.





3.1 Electrostatic discharge test

Discharge Type	Discharge Value	Result
Air discharge	±4KV	Normal operation

4. Packaging & dimensions

Form Factor	347.76(W) × 219.24(H) × 17.80(T) mm			
Installation Dimensions	Positioning hole: 240.0 (+0.3mm) × 140.0 (+0.3mm)			
Net Weight	1304g			
Packaging Standards				
Model	Dimensions	Layer	Quantity/Layer	Quantity(Pcs)
Carton1:	525mm(L)×330mm(W)×80mm (H)	1	1	1

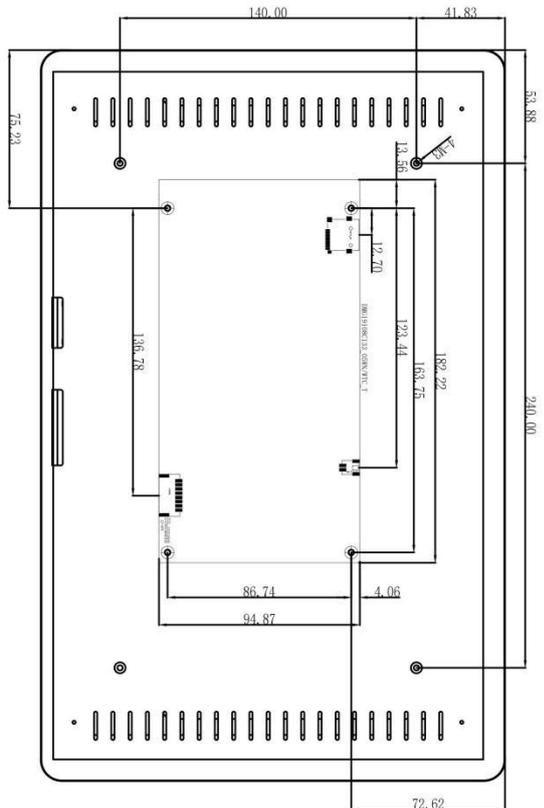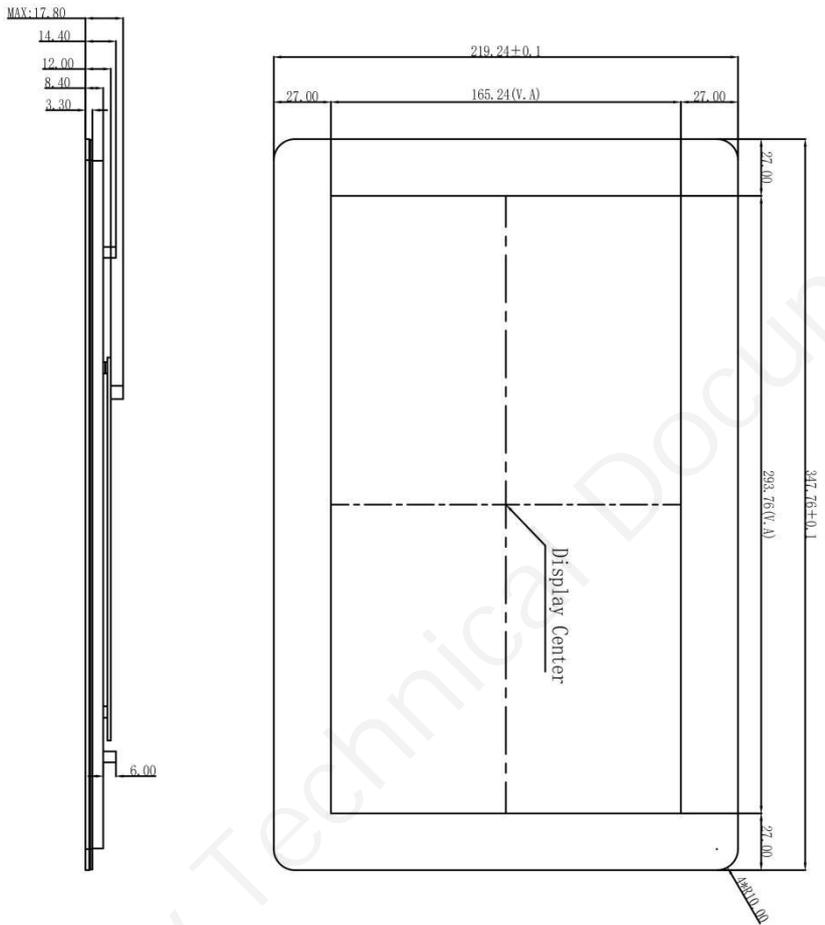

Definition	Pin#	Type	Description
VIN	1, 2	P	Power Input
NC	3	-	Undefined
TX2	4	0	UART2 Output
RX2	5	I	UART2 Input
RX2	6	I	UART2 Input
GND	7, 8	P	GND

1. Location hole is used as position reference.


2. Unmarked Tolerance is $\pm 0.3\text{mm}$

Note: Active area is marked in Dash lines

Model	DMG19108C133_05WTC			DWIN Technology		
Drawing	A 4	Drawn	G. Y	Date	2024.04.15	
Scale	1:1	Review		Date		
Unit	MM	Approval		Date		

5. Debugging tools

It is recommended for new users of DWIN smart LCMs to purchase official accessories. For more details, please refer to customer service center.

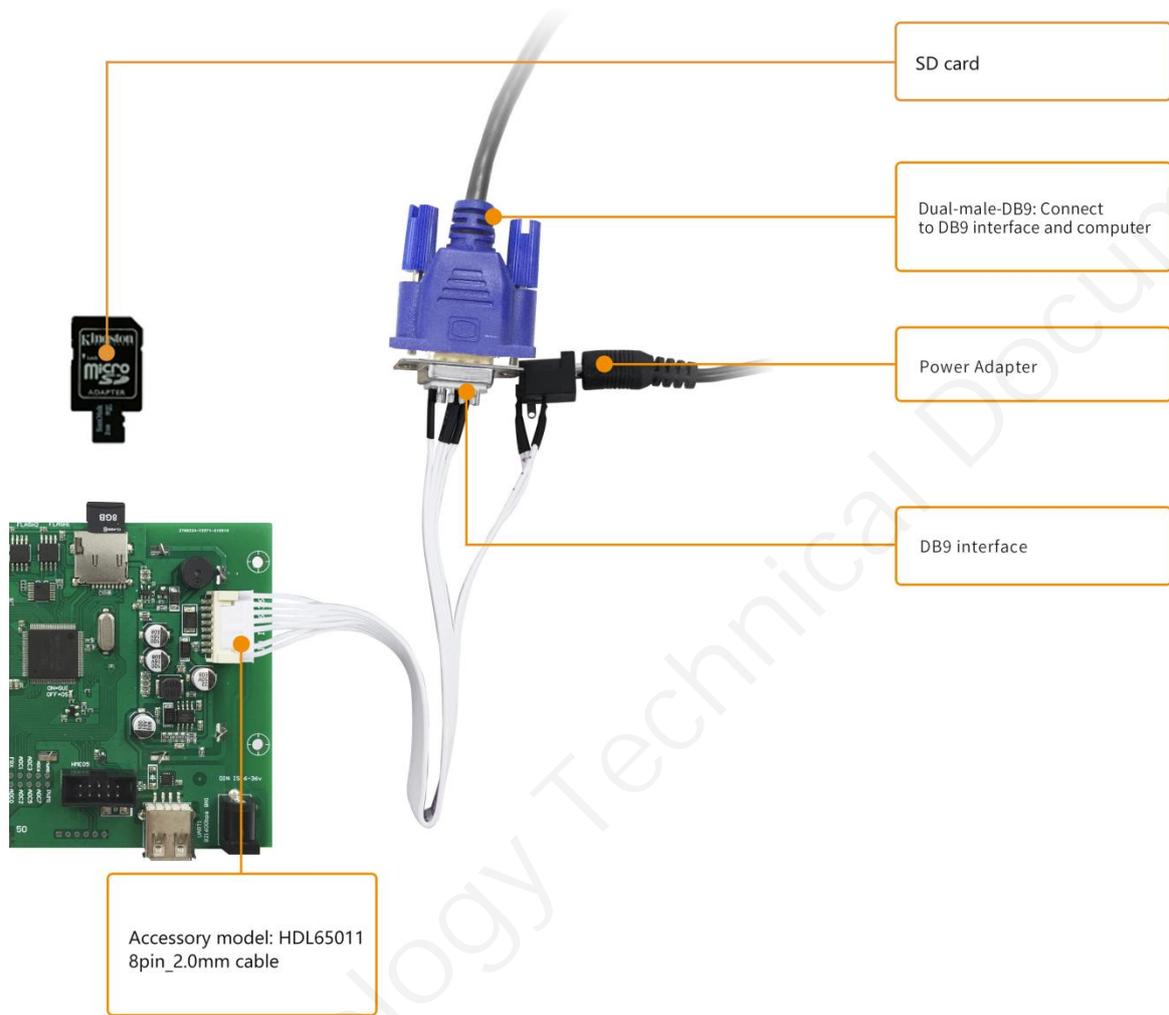

6. T5L series IC features

- (1) Mature and stable 8051 core which is the most widely used with the maximum operating frequency of T5L is up to 250MHz, 1T(single instruction cycle)high speed operation.
- (2) Separate GUI CPU Core running DGUS II System:
 - High-speed display memory, 2.4GB/S bandwidth.
 - 2D hardware acceleration, the decompression speed of JPEG is up to 200fps@1280*800 and the UI with animation and icons as its main feature is extremely cool and smooth.
 - Images and icons stored in JPEG format. Adopt Low-cost 16Mbytes SPI Flash.
 - Support CTP or RTP with adjustable sensitivity and maximum 400 Hz touch frequency.
 - 1-way 15bit 32Ksps PWM digital power amplifier driver loudspeaker, save power amplifier cost and achieve high signal-to-noise ratio and sound quality restoration.
 - 128Kbytes variable storage space for exchanging data with OS CPU Core and memory.
 - Support DGUS development and simulation on PC. Support background remote upgrade.
- (3) Separate CPU (OS CPU) core runs user 8051 code or DWIN OS system and user CPU is omitted in practical application:
 - Standard 8051 architecture and instruction set, 64Kbytes code space, 32Kbytes on-chip RAM.
 - 64 bit integer mathematical operation unit (MDU), including 64 bit MAC and 64 bit divider.
 - 28 IOs, 4-channel UARTs, 1-channel CAN, up to 8-channel 12-bit A/Ds and 2-channle 16-bit PWM of adjustable resolution.
 - Support IAP on-line simulation and debugging with unlimited number of breakpoints.
 - Upgrade code online through DGUS system.
- (4) 1Mbytes on-chip Flash with DWIN patent encryption technology ensure code and data security.
- (5) Operating temperature ranges from -40°C to +85°C(IC operating temperature customizable from -55°C to 105°C).

DWIN encourages users to design your own customized product based on T5L

7. Revision records

Rev	Revise Date	Content	Editor
00	2022-12-20	First Edition	Xu Ying
01	2023-05-06	Replaced with three T5L ASICs	Xu Ying
02	2024-04-18	Change PCB dimension	Xu Ying

Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

- Customer service Tel: +86 400 018 9008
- Customer service email: dwinhmi@dwin.com.cn
- DWIN Developer Forum: <https://forums.dwin-global.com/>

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

Important Disclaimer

DWIN reserves the right to make any changes to product designs without prior notice.

Customers should ensure strictly adhering to all the relevant standards and requirements during the product application process, including but not limited to functional safety, information security, and regulatory provisions.

DWIN shall not bear any joint and several liability for any consequences that may arise from customers' adoption of DWIN products. In particular, for risks that may lead to significant property losses, environmental hazards, personal injury, or even death, especially in high-risk application areas such as military applications, flammable and explosive places, and life-saving medical equipment, customers should independently assess the risks and take corresponding preventive and protective measures. DWIN shall not bear any relevant responsibility.