HDW070_008L

7 Inch, 800×RGB×480, 16.7M Colors, TN screen

Capacitive touch, HDMI interface display





Professional, Creditable, Successful

Display

ltem	Parameter	Description
Color	16.7M(16777216)colors	24 bit color 8R8G8B
Panel Type	TN	TN TFT LCM , normal viewing angle
Viewing Angle	70/70/50/70(L/R/U/D)	-
Active Area (A.A.)	154.08mm(W) ×85.92mm(H)	800x480
View Area (V.A.)	154.08mm(W) ×85.92mm(H)	800x480
Resolution	800x480	-
Backlight	LED	≥30000H(Continuous working with maximum brightness, time of the brightness decays to 50%)
Brightness	250nit	

Note: Displaying of high-contrast still images for more than 30 minutes may result in residual images. Please add screen saver to avoid this problem.

~0

• Voltage & Current

5						
Item	Conditions	Min	Тур	Мах	Unit	
Power Voltage	-	9	12	36	V	
Working Current	-	$\langle \mathcal{O} \rangle$	-	-	-	
Becommended neurophy 101/14 DC						

Recommended power supply: 12V 1A DC

Reliability Test

ltem	Conditions	Min	Тур	Мах	Unit
Working Temperature	60%RH at 12V voltage	-20	25	70	°C
Storage Temperature	X BCI	-30	25	80	°C
Working Humidity	25℃	10%	60%	90%	RH


Interface

Item	Description
Socket	Power interface, HDMI interface
USB interface	Yes (Connect USB Capacitive touch screen)
SD Card Slot	None
Peripheral	

• Packing Capacity & Dimension

Professional, Creditable, Successful

Dimension				
Dimension	165.0(W)×100.0(H)×18.7(T)mm			
Net Weight	-			
Packing Capacity				
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)
Carton1:	220mm(L)×160mm(W)×47mm (H)	-	-	-
Carton2:	250mm(L)×200mm(W)×80mm (H)	2	1	2
Carton3:	320mm(L)×270mm(W)×80mm (H)	2	2	4
Carton4:	450mm(L)×350mm(W)×300mm(H)	1	20	20
Carton5:	600mm(L)×450mm(W)×300mm(H)	1	34	34
	450mm(L)×350mm(W)×300mm(H) 600mm(L)×450mm(W)×300mm(H)	echn		

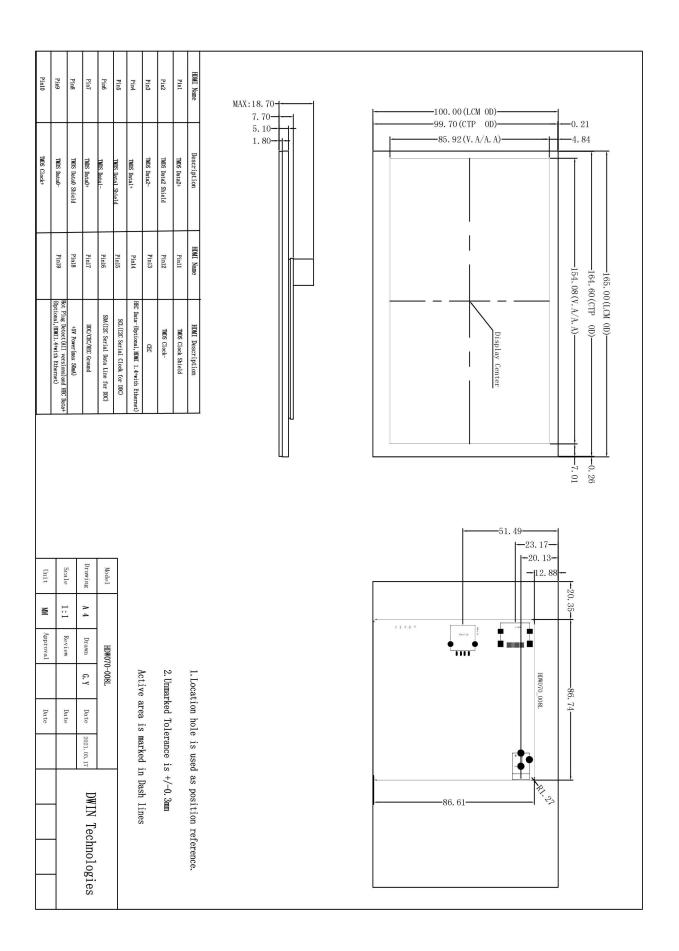

Record records

Ver	Revise Date	Content	Editor
00	2022-12-16	First Edition	Kaya
01	2025-01-21	Modify voltage	Chen

Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

Customer service Tel: +86-400-018-9008

Customer service E-mail: dwinhmi@dwin.com.cn

Website: www.dwin-global.com

DWIN Developer Forum: https://forums.dwin-global.com/index.php/forums

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

Important Disclaimer

DWIN reserves the right to make any changes to product designs without prior notice.

Customers should ensure strictly adhering to all the relevant standards and requirements during the product application process, including but not limited to functional safety, information security, and regulatory provisions.

DWIN shall not bear any joint and several liability for any consequences that may arise from customers' adoption of DWIN products. In particular, for risks that may lead to significant property losses, environmental hazards, personal injury, or even death, especially in high-risk application areas such as military applications, flammable and explosive places, and life-saving medical equipment, customers should independently assess the risks and take corresponding preventive and protective measures. DWIN shall not bear any relevant responsibility.