

HDW101_A5001L

10.1 Inch, 1024xRGBx600, IPS screen

CTP, HDMI interface display



Note: The physical picture is a left and right flip picture.

● Display Parameters

LCD Type	IPS, TFT LCD
Viewing Angle	Wide viewing angle (85°/85°/85°/85° typical), high contrast, and good color reproduction.
Resolution	1024×600 Pixel
Active Area (AA)	222.70mm (W)×125.30mm (H)
View Area (VA)	222.70mm (W)×125.30mm (H)
Backlight Service Life	>20000H
Brightness	450nit
Note: Use dynamic screen saver to prevent afterimages from prolonged fixed page display.	

● Touch Parameters

Touch Panel	Capacitive touch panel
Material	Tempered cover glass
Hardness	6H

● Electrical Specifications


Power Voltage	9-36V, typical value 12V.	
Current Parameters	460mA	VCC=12V (Standard supply voltage)
Recommended power supply: 12V 1A DC.		

● Operating Environment & Reliability Test

Item	Conditions	Min	Typ	Max	Unit
Operation Temperature	60%RH at 12V voltage	-20	25	70	°C
Storage Temperature	-	-30	25	80	°C
Operation Humidity	25°C	10%	60%	90%	RH
ESD	Air: $\pm 8KV$; Contact: $\pm 6KV$				
Protective Level	IP65 (Front)				



● Hardware Interface

Power Interface	3PIN_DC_DVΦ2.1
Display Interface	HDMI port (23PIN_HDMI_SH)
Touch Interface	USB 2.0

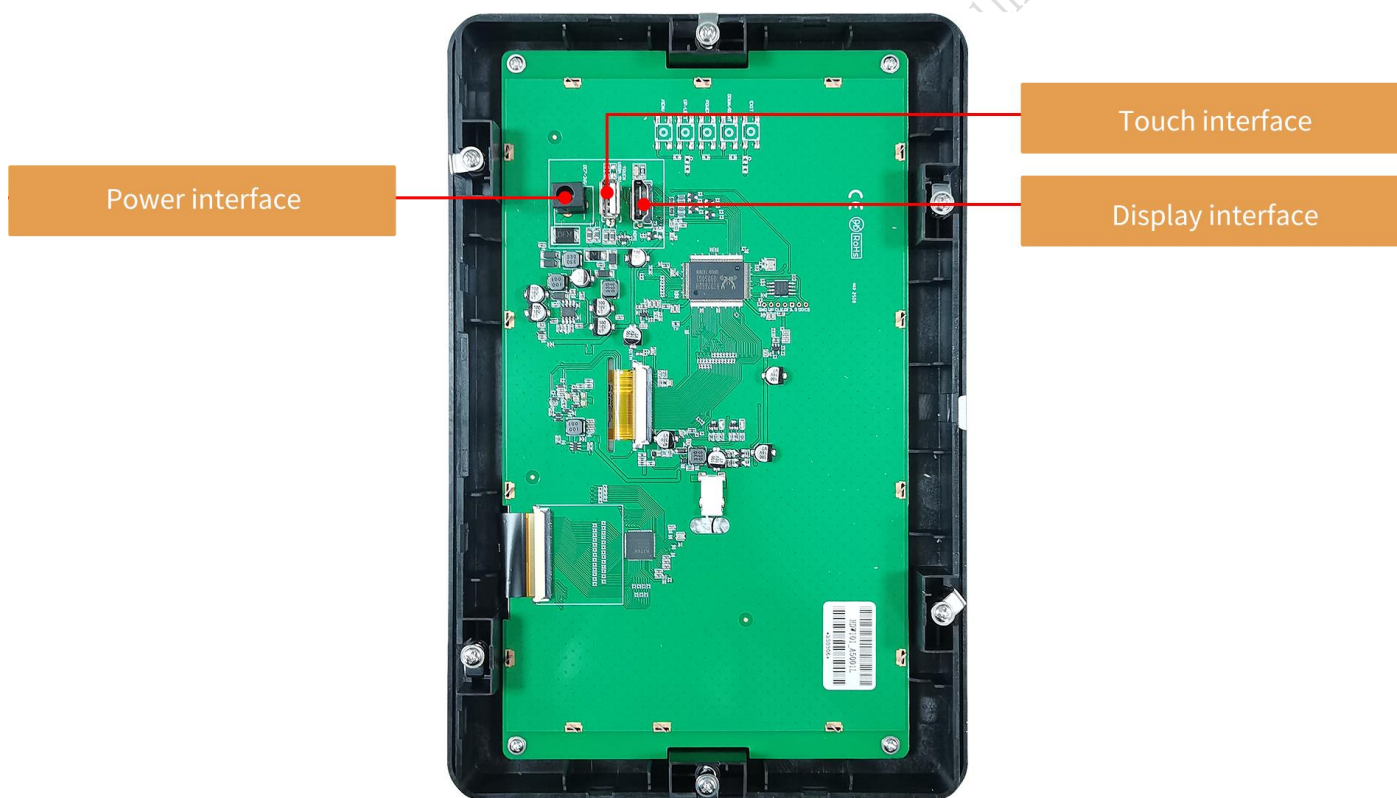

● Dimension

Dimension	290.00(W)×192.00(H)×29.50(T)mm
Net Weight	1070g

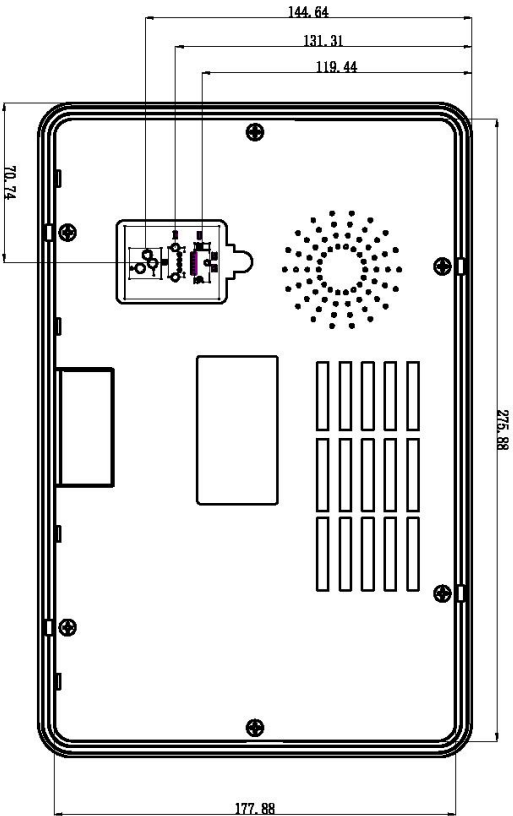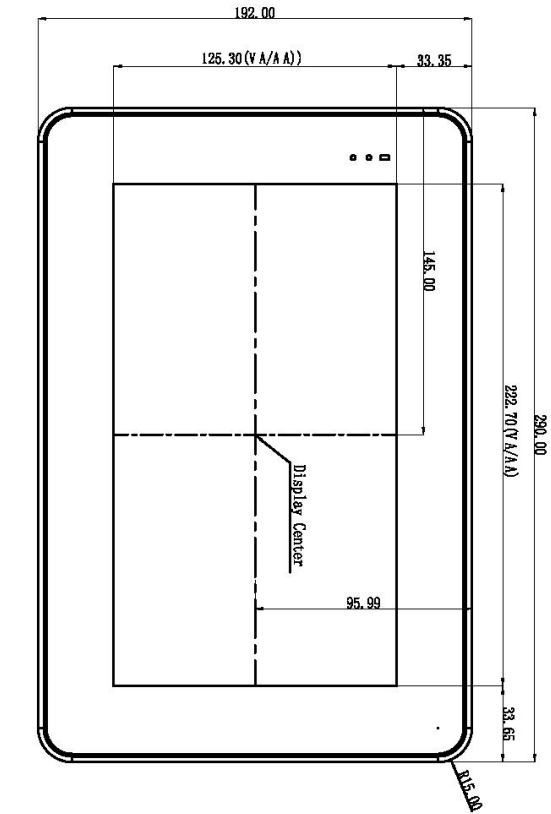

HDMI Name	HDMI Description	HDMI Name	HDMI Description
Pin1	TMS Data2+	Pin11	TMS Clock Shield
Pin2	TMS Data2 Shield	Pin12	TMS Clock-
Pin3	TMS Data2-	Pin13	CEC
Pin4	TMS Data1+	Pin14	HDC Data- (Optional, HDMI 1.4 with Ethernet)
Pin5	TMS Data1 Shield	Pin15	SCL (I2C Serial Clock for DDC)
Pin6	TMS Data1-	Pin16	SDA (I2C Serial Data line for DDC)
Pin7	TMS Data0+	Pin17	DDC/CEC/HEC Ground
Pin8	TMS Data0 Shield	Pin18	+5V Power (max 50mA)
Pin9	TMS Data0-	Pin19	Hot Plug Detect (All versions) and HEC Data- (Optional, HDMI 1.4 with Ethernet)
Pin10	TMS Clock+		

Model	HDW101_A5001L				DWIN Technology			
Drawing	A 4	Drawn	G. Y	Date				
Scale	1:1	Review		Date				
Unit	MM	Approval		Date				

Location hole is used as position reference.
Unmarked Tolerance is $\pm 0.3\text{mm}$
Active area is marked in Dash lines

● Revision Records

Rev	Revise Date	Content	Editor
00	2022-12-07	First edition	Kaya
01	2023-12-26	ESD solution upgraded	YML
02	2025-01-22	Modify power voltage	Chen
03	2025-12-10	Add hardware interface diagram	Chen

Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

Customer service Tel: +86-400-018-9008

Customer service E-mail: dwinhmi@dwin.com.cn

Website: www.dwin-global.com

DWIN Developer Forum: <https://forums.dwin-global.com/index.php/forums>

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

Important Disclaimer

DWIN reserves the right to make any changes to product designs without prior notice.

Customers should ensure strictly adhering to all the relevant standards and requirements during the product application process, including but not limited to functional safety, information security, and regulatory provisions.

DWIN shall not bear any joint and several liability for any consequences that may arise from customers' adoption of DWIN products. In particular, for risks that may lead to significant property losses, environmental hazards, personal injury, or even death, especially in high-risk application areas such as military applications, flammable and explosive places, and life-saving medical equipment, customers should independently assess the risks and take corresponding preventive and protective measures. DWIN shall not bear any relevant responsibility.

DWIN Technology Technical Document