

HDW121_001L

12.1 Inch, 1280xRGBx800, 16.7M Colors, TN screen, Capacitive Touch





Record of Revision

Ver	Revise Date	Content	Editor
00	2022-12-22	First Edition	Kaya

Display

Item	Parameter	Description
Color	16.7M(16777216)colors	24 bit color 8R8G8B
Panel Type	TN	TN TFT LCM,normal viewing angle
Viewing Angle	70/70/50/70(L/R/U/D)	-
Active Area (A.A.)	261.12mm(W)x163.20mm(H)	1280×800
View Area (V.A.)	262.7mm(W)x164.8mm(H)	1280×800
Resolution	1280×800	Support 0°/90°/180°/270°rotated display
Backlight	LED	≥30000H (Continuous working with maximum brightness,time of the brightness decays to 50%)
Brightness	300nit	-

Note:You can use dynamic screen saver wallpapers to avoid afterimages caused by fixed page display for a long

Voltage & Current

Item	Conditions	Min	Тур	Max	Unit
Power Voltage	-	12.0	12.0	36.0	V
Operation Current	VCC = +12V Backlight on	~ O.C.)	660		mA
	VCC = +12V Backlight off		-		

Recommended power supply: 12V 1A DC

Reliability Test

Item	Conditions	Min	Тур	Max	Unit
Working Temperature	60%RH at 12V voltage	-30	25	80	$^{\circ}$
Storage Temperature	-	-30	25	80	$^{\circ}$
Working Humidity	25℃	10%	60%	90%	RH

Interface

ltem	Description
Socket	Power interface, HDMI interface
USB Interface	Yes
SD Card Slot	None

Peripheral


Peripheral Capacitive touch panel

Packing Capacity & Dimension

Dimension					
Dimension	307.2(W)x208.9(H)x26.9(T)mm				
Net Weight	1654g				
Packing Capacity					
Model	Size	Layer	Quantity/Layer	Quantity(Pcs)	
Carton1:	220mm(L)×160mm(W)×47mm (H)	-	-	-	
Carton2:	250mm(L)×200mm(W)×80mm (H)	-	-	-	
Carton3:	320mm(L)×270mm(W)×80mm (H)	2	1	2	
Carton4:	450mm(L)×350mm(W)×300mm(H)	1	10	10	
Carton5:	600mm(L)×450mm(W)×300mm(H)	1	16	16	

Disclaimer:

- 1, The product design is subject to alternation and improvement without prior notice.
- apply.lf custon ..nel. 2, There are multiple parallel raw materials coexisting to guarantee the stable supply.If customers have particular raw material preferences or requirements, please contact the sales personnel.

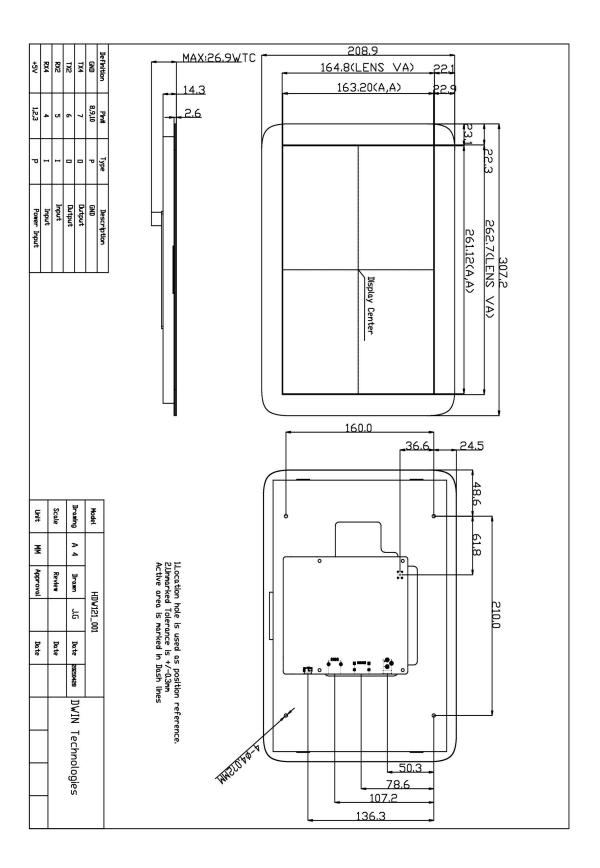



Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

Customer service Tel: +86-400-018-9008

Customer service E-mail: dwinhmi@dwin.com.cn

Website: www.dwin-global.com

DWIN Developer Forum: https://forums.dwin-global.com/index.php/forums

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

Important Disclaimer

DWIN reserves the right to make any changes to product designs without prior notice

Customers should ensure strictly adhering to all the relevant standards and requirements during the product application process, including but not limited to functional safety, information security, and regulatory provisions. DWIN shall not bear any joint and several liability for any consequences that may arise from customers' adoption of DWIN products. In particular, for risks that may lead to significant property losses, environmental hazards, personal injury, or even death, especially in high-risk application areas such as military applications, flammable

and explosive places, and life-saving medical equipment, customers should independently assess the risks and